

Semi-Heterarchical Distributed Control of a Holonic Manufacturing Cell

Theodor Borangiu*, Silviu Raileanu*, Andrei Rosu*, Mihai Parlea*, Silvia Anton*, Florin D. Anton*

*University Politehnica of Bucharest, Dept. of Automation and Applied Informatics, Bucharest, RO 060032, ROMANIA (Tel: +40 21 402 9314; e-mail: borangiu@cimr.pub.ro).

Abstract: The paper describes a solution and implementing framework for the management of changes which may occur in a holonic manufacturing system. This solution is part of the semi-heterarchical control architecture developed for agile job shop assembly with intelligent robots-vision workstations. Two categories of changes in the manufacturing system are considered: (i) changes occurring in resource status at process level: resource breakdown, failure of (vision-based) in-line inspection operation, and depletion of local robot storages; (ii) changes in production orders at business (ERP) level: rush orders. All these situations trigger production plan update and rescheduling (redefine the list of Order Holons) by pipelining CNP-type resource bidding at shop-floor horizon with global product scheduling at aggregate batch horizon. Failure- and recovery management are developed as generic scenarios embedding the CNP mechanism into production self-rescheduling. Implementing solutions and experimental results are reported for a 6-station robot-vision assembly cell with twin-track closed-loop pallet transportation system, Cartesian pallet feeding station, dual assembly component feeder with robot-vision tending and product tracking RD/WR devices. Future developments will consider manufacturing integration at enterprise level.

Keywords: holonic manufacturing, distributed control, reconfigurable systems, robotics, applied AI

1. INTRODUCTION

Some of the problems that discrete, repetitive manufacturing industry faces are: resource availability (unexpected failure or recovery of a resource and insertion or removal of resources from the production process) and treatment of "rush orders". To cope with these problems three concepts have been developed in past years: (i) *Flexible Manufacturing Systems* – FMS (Groover, 1987; Upton, 1992), (ii) *Multi-Agent* – MAS and *Holonic Manufacturing Systems* – HMS (Van Brussel *et al.*, 1998; Leitao, 2006) and (iii) *Product-Driven Control for Manufacturing* – PDCM (Petin *et al.*, 2006; Gouyon *et al.*, 2007). The first, FMS, deals with the physical composition of a manufacturing cell which has a minimal degree of flexibility allowing easy reconfiguration and also facing disturbances like resource breakdowns. The second concept, HMS, deals with the control part of a manufacturing cell, structuring it into basic building blocks characterized by autonomy and cooperation. Manufacturing tasks are solved by cooperation between these entities and to the exterior the system is seen as a single entity, making it easier to integrate such structures with the upper levels (ERP) of an enterprise. The last concept, of "intelligent product", assumes that a local intelligence is provided to the product (moving on a pallets) integrated via RFID devices in an Enhanced Information Management System (IMS-RFID) which is used to retrieve process-, resource- and cell- data for product routing.

The need of methods and tools to manage the process of change addresses both the level of business reengineering (including information technology infrastructures) and shop floor reengineering (production processes are executing). A

particularly critical element in the shop floor reengineering process is the control system. Current control / supervision systems are not agile because any shop floor change requires programming modifications, implying the need for qualified programmers, usually not available in manufacturing SMEs. Even small changes (e.g. rush orders) might affect the global system architecture, which inevitably increases the programming effort and the potential for side-effect errors.

The methodology used for shop-floor reengineering, proposed in this paper, compensates for the deficiencies of both hierarchical and heterarchical enterprise control systems, and is based on new concepts for the design and implementing of manufacturing control systems in the frame of Holonic Manufacturing Execution Systems. Such concepts attempt to model a manufacturing system based on some analogies with other existing theoretical, natural or social organization systems (Babiceanu *et al.*, 2004; Barata, 2000; Van Brussel *et al.*, 1998). The *agent-based* and *holonic* paradigms symbolize these new approaches; they deal with the re-configurability in discrete, repetitive manufacturing by introducing an adaptive production control system that evolves dynamically between a more hierarchical (providing global efficiency / optimality) and a more heterarchical (self-adapting, fault-tolerant, agile) control architecture, based in self-organization and learning capabilities embedded in individual holons – information counterparts of resources, processes and products (Bellifemine *et al.*, 2001).

A generic distributed enterprise control architectures for shop floor reengineering aims at accommodating the requirements:

- **Modularity:** production systems should be created by composing modularized manufacturing components,

which become basic building blocks (developed on the basis of the processes they are to cater for).

- *Configuring rather than programming*: the addition or removal of any building block is done smoothly, with minimal programming effort. The system composition and its behaviour are established by configuring the links among modules, using contractual mechanisms.
- *High reusability*: the building blocks should be reused for as long as possible, and easily updated.
- *Legacy systems migration*: legacy and heterogeneous controllers are accepted in the global architecture.

The proposed multi-agent control architecture supports the reengineering process of shop floor control. This generic MAS architecture uses contracts to govern the relationships between coalition members (production agents), including the reengineering process within the life cycle. The control system architecture considers that manufacturing components can be reused and plugged/unplugged with reduced programming effort, supporting the *plug& produce* metaphor.

The Service Oriented Architecture (SOA) concept is used to

face the interoperability problems in the autonomous, reconfigurable architecture implemented as a HMES. Each device controller encapsulates functions and services that its associated physical device can perform). These services, that can be modified, added or removed (e.g. a new product can be handled by a robot after the aggregation of a new gripper), are then exposed to be invoked by other device controllers.

The SOA for production management and control integrates four areas: (1) Offer Request Management; (2) Management of Client Orders; (3) Order- & Supply- Holon (OH, SH) Management; (4) OH Execution & Tracking) – Fig. 1. The first area is responsible for generating offers in response to requests, based on: product knowledge (embedded in Product Holons - PH), resource capabilities (from Resource Holon - RH data), supply constraints and activities planning (CAPP). Once received customer orders, they are interpreted, validated and mapped into aggregate production orders (APO) at ERP level. APO is the input to the Global Production Scheduler (GPS) which, generates the lists of Supply- (SH) and Order Holons (OH)

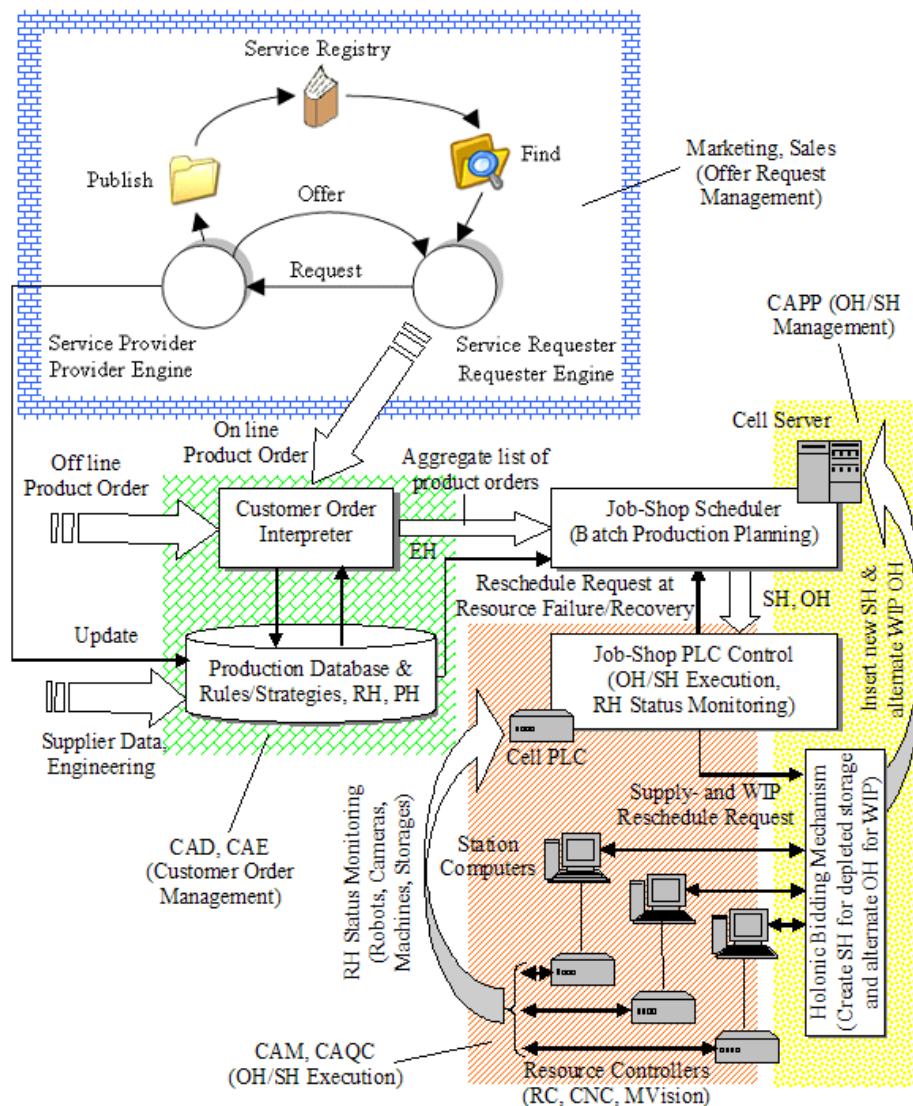


Fig. 1 – SOA integrates job-shop, team-based manufacturing with holonic robot control

The HMES implementing the MAS reference architecture assumes that there is a similarity between the proposed reengineering process and the formation of consortia regulated by contracts in networked enterprise units.

The adoption of web services in the HMES holarchy will satisfy the requirements (Jia and Fuchs, 2002):

- Resources can be encapsulated with a service provider that acts like a bridge between the internal structure and the exposed interface.
- Some services can be composed by other services, creating a levelled structure of services (e.g. task-and product-oriented learning of virtual cameras).
- Interoperability in the MAS is addressed by using common communication semantics based on the use of open protocols or web technologies (services).
- Fault-tolerant attribute is provided (anomalies that may occur during the production processes, and identification possible disturbances are handled).

The scientific contribution of the paper is the definition and design of an implementing frame for a holonic control architecture for agile job shop assembly with networked intelligent robots, based on the dynamic simulation of material processing and transportation. The holarchy is defined considering the PROSA reference architecture relative to which in-line vision-based quality control was added by help of feature-based descriptions of materials.

The paper describes in detail the methodology used for the management of changes – reallocating already scheduled production orders (OHs) in a perturbed environment. The control architecture is distributed, of semi-heterarchical type, in which the organizational control is arranged on two levels, referred to as *global* and *local*.

The global level assumes the responsibility for planning and coordination of shop-floor level activities and the resolution of conflicts between local objectives; the local level has autonomy over the planning and control of internal activities (e.g. the robot assembly team).

There is an entity placed on a superior decisional level – the Global Production Scheduler (GPS) – which sends aggregate product orders, optimally scheduled – Order Holons (OH), to entities on inferior levels – Device (e.g. Robot, Machine) Controller, cooperating to accomplish the orders. The schedules delivered by the GPS are not imposed to any of the individual resources; instead, they are only recommended to the decision-making entities – the Order Holons. These recommendations are followed as long as failures or changes do not occur in the system (*hierarchical operating mode*); they will be ignored at failure/change and recovery moments, being replaced by alternate schedules created from resource (robot) offers mutually agreed by cooperation mechanism (*heterarchical operating mode*). The holonic manufacturing control automatically switches between these two modes.

The holonic control strategy follows the key features of the PROSA reference architecture (Van Brussel *et al.*, 1998; Valkaenars, 1994), implemented as an extended HMES:

- Automatic switching between *hierarchical* (efficient / optimal use of resources) and *heterarchical* (agility to order changes, e.g. rush orders, and fault tolerance to resource breakdowns) production control modes.
- Automatic planning and execution via Supply Holons (SH) of part supply; automatic generation of self-supply tasks upon detecting local storage depletion.
- In-line vision-based part qualification and inspection of products in user-definable execution stages.
- Robotized processing (e.g. assembling, machine tending, fastening, assembling) under visual guidance

2. SYSTEM ARCHITECTURE

As suggested by the PROSA abstract, the manufacturing system was broken down into three basic holons:

1. **Resource Holons (RH)**: they hold information about cell resources. Any resource may have a number of sub-resources, which are also seen as holons.
2. **Product Holons (PH)**: they hold information about a product type. The product information is more than a theoretical description of the physical counterpart but not directly associated with one individual physical item, unlike the resource holon (Leitao and Restivo, 2006).
3. **Order Holons (OH)**: represent all information necessary to produce one item of a product type. This holon is directly associated with the emerging item, it holds information about its status. OHs are created by the GPS from an Aggregate List of Product Orders generated at ERP level. Alternate OH are created in response to changes in product batches (*rush orders*) and failures (resource breakdown, storage depletion).

A holon designs a class containing data fields and functionalities. Beside the information part, holons possess a physical part too, like the *product_on_pallet* for OH.

The way in which different types of holons communicate and the type of information they exchange depends on the functionalities imposed to the manufacturing cell. Fig. 2 shows the interaction diagram of the basic holon classes as they were implemented into software to solve scheduling and failure management problems. A **HolonManager** hosts all holons and coordinates the data exchange.

The HolonManager entity is responsible with the planning (by help of **Expertise Holons** – EH) and management of OH as Staff Holons in the PROSA architecture do; in addition, it externally interfaces the application (maps the OH list in standard PLC files and tracks OH execution).

A **basic process plan** is generated initially, upon receiving from the ERP level an APO or raw orders, based on: (i) Knowledge-based scheduling (KBS, inspired by Kusiak, 1990) or (ii) Resolved Scheduling Rate Planner (RSRP, Borangiu, 2008). This basic process plan is computed at the global horizon of *P* products of the aggregate batches, and consists from a list of Supply Holons responsible for feeding the local robot storages and a list of Order Holons driving product execution. The OH list is mapped into PLC files for batch execution.

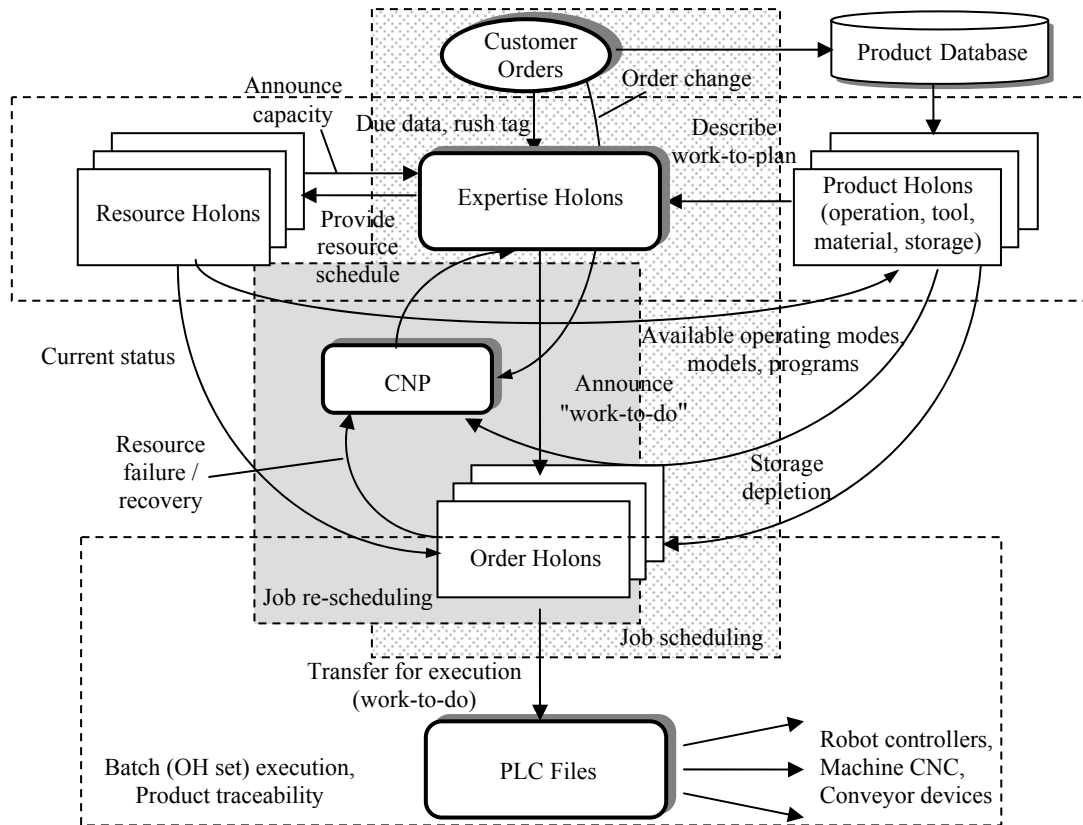


Fig. 2. Basic holon cooperation and communication structure in the semi-heterarchical control architecture

Alternative process plans, triggered by resource failure, local storage depletion or occurrence of rush orders, are pipelined automatically: (a) at the horizon of p_E products in course of execution in the system, based on heterarchical contract negotiation schemes (CNP-type) between valid resources; (b) at the global horizon of $P - p_T - p_E$ remaining products, p_T = number of terminated products, based on hierarchical GSP. Two categories of changes are considered:

1. Changes occurring in the resource status at shop floor level: (i) breakdown of one resource (e.g. robot, machine tool); (ii) failure of one inspection operation (e.g. visual measurement of a component/assembly); (iii) depletion of one robot workstation storage.
2. Changes occurring in production orders, i.e. the system receives a *rush order* as a new batch request (APO).

All these situations trigger a fail-safe mechanism which manages the changes, providing respectively fault-tolerance at critical events in the first category, and agility in reacting (via ERP) to high-priority batch orders. A *FailureManager* was created for managing changes in resource status. A virtually identical counterpart, the *RecoveryManager*, takes care of the complementary event (resource recovery).

Upon monitoring the processing resources (robots), their status may be at run time: *available* – the resource can process products; *failed* – the resource doesn't respond to the interrogation of the PLC (the entity responsible for Order Holon execution), and consequently cannot be used in production; *no stock* – similar to failed but handled different

(the resource cannot be used in production during re-supply, but it does respond to PLC status interrogations).

There are two types of information exchanges between the PLC (master over OH execution) and the resource controllers for estimation of their status during production execution:

- *Background interrogation*: periodic polling of I/O lines RQST_STATUS and ACK_STATUS between the PLC – OH coordinator and the Resource Controllers (robot, machine tool, ASRS).
- *Ultimate interrogation*: just before taking the decision to direct a pallet (already scheduled to a robot station) to the corresponding robot workplace, a TCP/IP communication between the PLC and the robot controller takes place (according to the protocol in Fig. 3). This communication validates the execution of the current OH operation on the particular resource (robot).

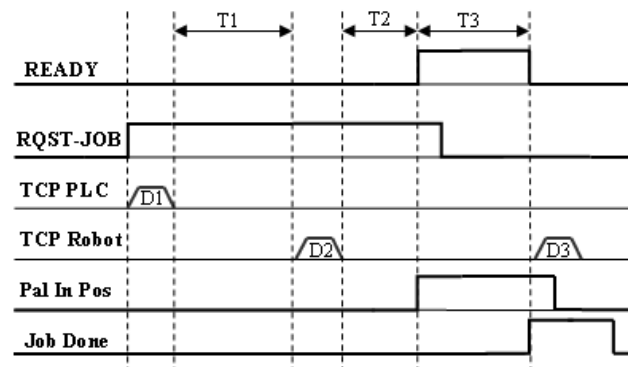


Fig. 3. Communication protocol between the PLC and a Robot Controller authorizing an OH operation execution

In this protocol, READY is a signal generated by the Robot Controller indicating the *idle* or *busy* state of the resource (robot). The PLC requests through its digital output line RQST-JOB to use the robot for an assigned OH operation upon the product placed on the pallet waiting to enter the robot workstation. D1 details the scheduled job via the TCP PLC transmission line from the PLC to the Robot Controller. The Robot Controller indicates in D2 job acceptance or denial via the TCP Robot transmission line.

When the job is accepted, the pallet is directed towards the robot's workplace, where its arrival is signalled to the Robot Controller by the Pal In Pos digital output signal of the PLC. Job Done is a signal indicating job termination (D3 details the way the job terminated: success, failure). T1 is the decision time on job acceptance (storage evaluation etc), T2 is the transport time to move the pallet from the main conveyor loop to the robot workplace, and T3 is the time for job execution.

Upon periodic interrogation, the entity coordinating OH execution – the PLC – checks the status of all resources, which acknowledge being *available* or *failed*. The ultimate interrogation checks only the state of one resource – the one for which a current operation of an OH was scheduled; during this exchange of information, the PLC is informed whether the resource is *available*, *failed* or valid yet unable to execute the requested OH operation upon the product due to components missing in its storage (*no stock* status).

3. MANAGING RESOURCE BREAKDOWN/RECOVERY

When the **failure** status of a resource is detected, the *FailureManager* is called, executing a number of actions according to the procedure given below (Fig. 4):

1. Stop immediately the transitions of executing OH, i.e. the circulation of *products_on_pallets* in the cell; production continues at the remaining valid resources (robots).
2. Update the resource holons with the new states of all robots.
3. Read Order Holons currently in execution in the cell.
4. Evaluate all products if they can still be finished, by checking the status of each planned OH:
 - if the OH was in the failing robot station, mark it as failed and evacuate its *product_on_pallet*;
 - if the OH is in the system, but cannot be completed anymore because the failed resource was critical for this product, mark it as failed and evacuate its *product_on_pallet*;
 - if the OH is not yet in the system, but cannot be completed due to the failure of the resource which is critical for that product, mark it as failed (n_e is the total number of such OH).
5. For the remaining $n'_{wip} = n_{wip} - n_{fail}$ schedulable OH in the system, locate their *products_on_pallets* and initialize the transport simulation associated to the current operational configuration of the system.

Authorise the n'_{wip} OH to launch Contract Net Protocol-based negotiations (HBM) with the remaining available Resource Holons for re-scheduling of their associated operations. n_{wip} are the OH currently introduced in the system (in the present implementation, $n_{wip} \leq 5$), and n_{fail} is the total number of OH currently in the system, which cannot be finished because they need the failed resource at some moment during their execution

6. Run the Global Production Scheduling algorithm for the $N - n_{fin} - n_{wip} - n_e$ OH not yet introduced in the system, where a number of N OH was scheduled in total and n_{fin} OH were finished.
7. Delete the orders stored on the system and transfer the updated orders to the system
8. Resume *product_on_pallet* transfer within the transport system (allow OH transitions in the system).

It might happen that a failed robot is repaired before the current manufacturing cycle is finished. In this **recovery** case, the cell regained the ability to run at full capacity but the lined up orders do not make use of this fact, as they are managed by the system in a degraded mode.

The procedure of rescheduling back the Order Holons is virtually identical to the one used in case of failure; the main deference is that none of the *products_on_pallets* being currently processed need to be evacuated since there is no reason to assume they could not be completed. Any orders that were marked as failed due to temporary resource unavailability are now untaged and included in the APO list for scheduling at the horizon of the rest of batch, as they may be manufactured again due to resource recovery (Lastra and Delamerm, 2006).

4. MANAGEMENT OF RUSH ORDERS

The system is agile to changes occurring in production orders too, i.e. manages **rush orders** received as *new batch requests* from the ERP level while executing an already scheduled batch production (a sequence of OH).

Because of the similarity between a task run on a processor and a batch of orders executed in a manufacturing cell (both are pre-emptive, independent of other tasks or batches, have a release, a delivery date and an fixed or limited interval in which they are processed), the Earliest Deadline First (EDF) procedure was used to schedule new batches (rush orders) for the robotized assembly cell.

EDF is a dynamic scheduling algorithm generally used in real-time operating systems for scheduling periodic tasks on resources, e.g. processors (Sha et al., 2004). It works by assigning a unique priority to each task, the priority being inversely proportional to its absolute deadline and then placing the task in an ordered queue. Whenever a scheduling event occurs the queue is searched for the task closest to its deadline term to be met (Borangui et al., 2008a; Barata, 2005; Rahimifard, 2004).

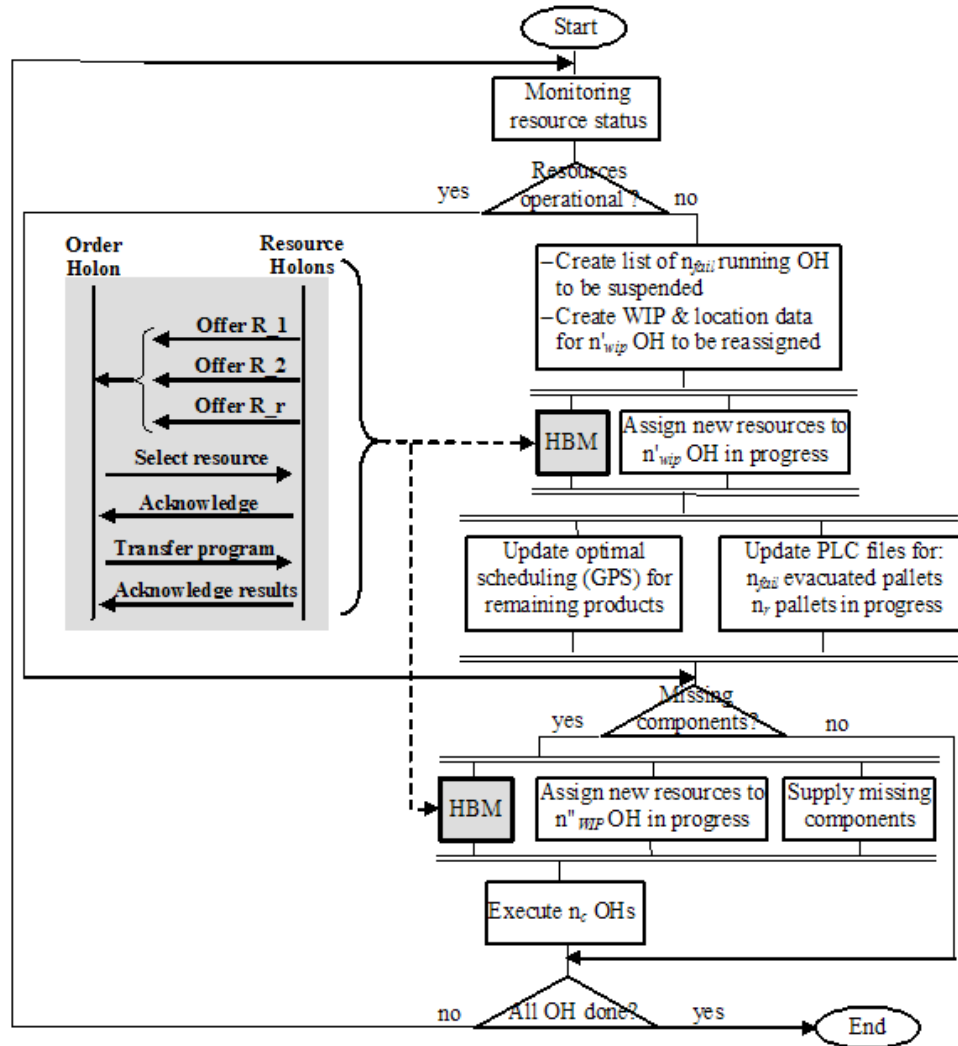


Fig.4. Dynamic OH rescheduling at resource failure/storage depletion with embedded CNP job negotiation (monex)

A *feasibility test* for the analysis of EDF scheduling was presented in (Liu and Layland, 1973); the test shows that if: (1) all tasks are periodic, independent, fully pre-emptive; (2) all tasks are released at the beginning of the period and have deadlines equal to their period; (3) all tasks have a fixed computation time or a fixed upper bound which is less or equal to their period; (4) no task can voluntarily stop itself; (5) all overheads are assumed to be 0; (6) there is only one processor, then a set of n periodic tasks can be scheduled if

$$\sum_{i=1}^n \frac{C_i}{T_i} \leq 1, n = \text{number of tasks}, C_i = \text{execution time}, T_i = \text{cycle time}$$

or, in other words, if the utilization of the processor (resource) is less than 100%.

A *batch* or Aggregate Product Order list (APO) is composed of raw orders (list of products to be manufactured); this is why two different batches are independent. Nevertheless, there is a difference between a task and a batch of products: a task is periodic while a batch is generally a periodic. This means that instead of testing the feasibility of assigning batches to the production system considering the equation above, one can use the following test: "for an ordered queue (based on delivery date) of n batches with computed

makespan, if $\sum_{j=1}^i \text{makespan}_j \leq \text{delivery_date}_i, i = \overline{1, n}$, then

the batches can be assigned to the production cell using EDF without passing over the delivery dates".

This EDF approach is used to insert **rush orders** in a production already scheduled by the GPS; the steps below are carried out for inserting a new production batch during the execution of a previously created sequence of OH (Fig. 5):

0. Compute the remaining time for finishing the rest of the current batch (if necessary).
1. Insert new production data: product types, quantities, delivery dates.
2. Separate products according to their delivery date.
3. Form the entities "production batches" (a *production batch* is composed of all the products having the same delivery date).
4. Generate raw orders in production batches (APO lists).
5. Schedule the raw orders (using a GPS algorithm, e.g. KBS or Step Scheduler), compute the makespan and test if the inserted batch can be done (the makespan is smaller than the time interval to delivery date if production starts now).

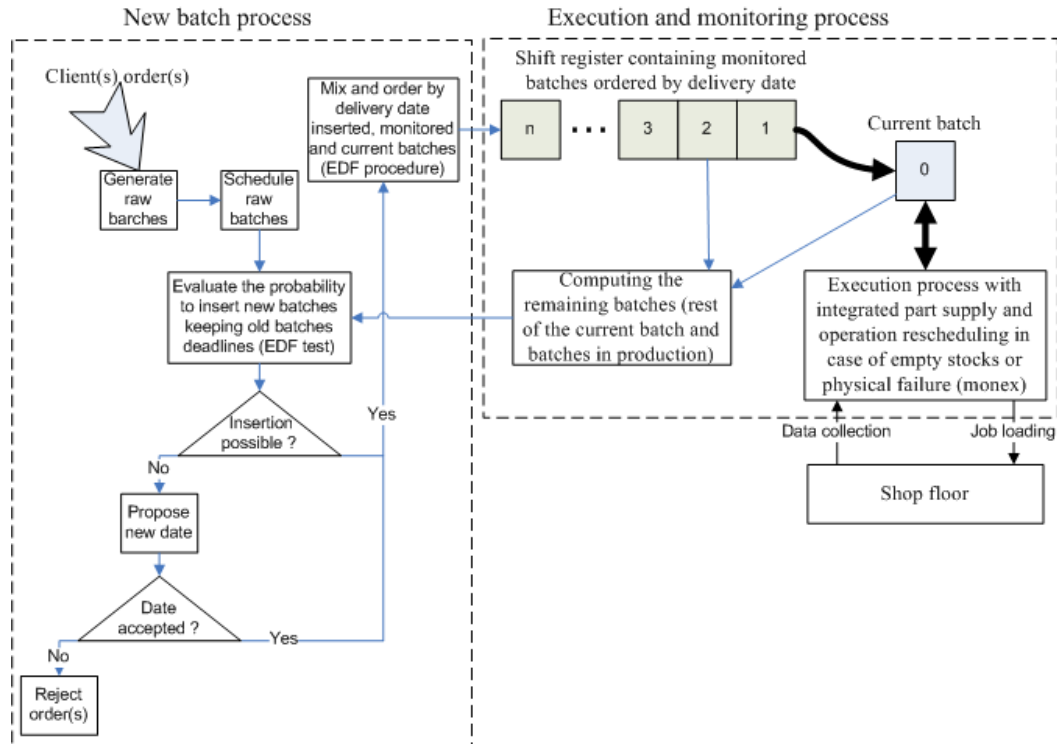


Fig. 5. Add rush order diagram and integration with dynamic job re-scheduling based on CNP negotiation (monex)

6. Analyse the possibility of allocating batches to the cell using the EDF and second equation for feasibility test.
7. Allocate the batches on the production system according to the EDF procedure.
8. Resume execution process with new scheduled OH.

In this mechanism for managing the changes in production orders, an *inserted batch* is a batch that arrives while another one is in execution. A *monitored batch* is one whose orders are scheduled and assigned to the cell (it has a priority and is waiting to enter execution). A *current batch* is that executing.

The capability of adding rush orders to production needs a new entity, the **batch**. Thus, job scheduling is done at batch level (all orders with the same delivery date are scheduled together) and then batches are assigned to the cell according to their delivery date, using the EDF procedure (Table 1).

Table 1. The minimal structure of a *batch holon*

Type	Name	Description
string	batch_name	Name or index of the batch
Date	delivery_date	Delivery date of the orders
Product[]	requested_products	Vector containing the products to be executed
Resource[]	used_resources	Vector containing the configuration used for current batch planning
Order[]	orders_to_execute	Vector containing the entities OH already scheduled using a specified cell structure (defined by the variable used_resources)
int	makespan	Time interval needed for the current batch to be executed if started now and not interrupted (it is a result of scheduling)

Because batch execution is interruptible (pre-emptive system), new batches (rush orders) can be introduced exactly at the moment of their arrival. The insertion process is triggered by the arrival of a "new order" event; a real-time acceptance response can be provided (via the ERP level) to the customer if the rush order can be executed at requested delivery date.

5. CONCLUSIONS

The distributed control solution was implemented, tested and validated on a real manufacturing structure with 6 industrial assembly robots and 4-axis CNC milling machines, using the holonic approach. This holonic platform was finalized during 2008 in the Laboratory of Robotics and Artificial Intelligence of the Department of Automation and Industrial Informatics within the University Politehnica of Bucharest (Fig.6).

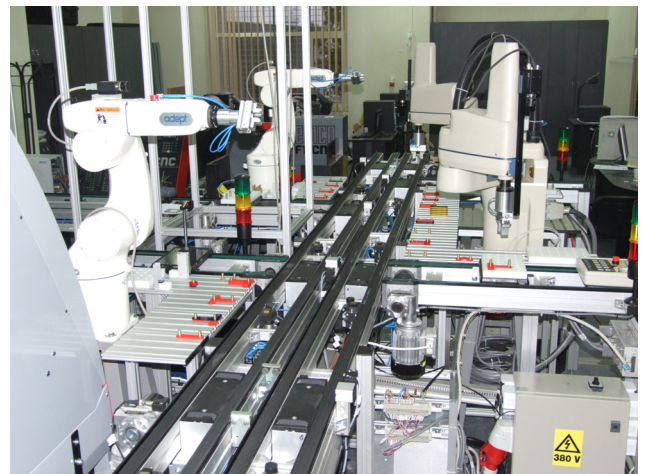


Fig. 6. Layout of the manufacturing cell with holonic control

The control structure is fully operational, both in the normal hierarchical mode and upon switching automatically to the heterarchical one in response to discussed changes.

Production scheduling at batch level was implemented and tested using the EDF method; Fig. 7 shows the results obtained when two new batch orders $T_24 = (4, 17)$ and $T_25 = (1, 3)$ are received at time $T = 2$ after the execution of three planned batches: $T_11 = (2, 18)$, $T_12 = (3, 20)$, $T_13 = (7, 11)$ started. Here $T_{ij} = (m, dd)$ signifies the number (j) of the batch for which execution was requested at date i ; the batch has the makespan m and due delivery date, dd (both expressed in time units).

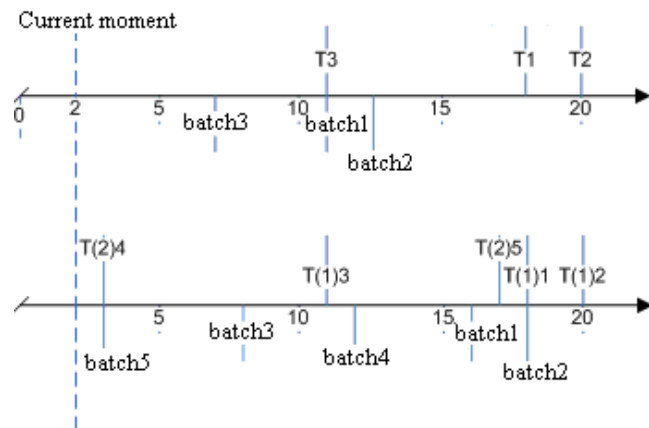


Fig. 7. Inserting new batches among executing ones with the EDF algorithm.

ACKNOWLEDGMENTS

This work was partially supported from the scientific grant 146 / 2007 "Autonomous, intelligent robot-vision platforms for product qualifying, sorting / processing / packaging and quality inspection with Service-Oriented, Feature-based HolonIc Control aRchitecture – SOFHICOR" of the National Agency of Scientific Research (ANCS).

REFERENCES

- Babiceanu, R.F. *et al* (2004). Framework for control of automated material-handling systems using holonic manufacturing approach, *Int. J. Prod. Res.*, **42**, 17, Taylor & Francis, 3551-3564.
- Barata, J. and L.M. Camarinha-Matos (2000). Shop floor re engineering to support agility in virtual enterprise environments, in *E-Business and Virtual Enterprises*, Kluwer Academic Publishers, London, 287-291.
- Barata, J. (2005). *Coalition Based Approach for Shop Floor Agility*, Orion Edition, Amadora-Lisbon
- Bellifemine, F., Poggi, A. and G. Rimassa (2001). Developing Multi-Agent Systems with FIPA-Compliant Agent Framework, *Software Practice and Experience*, **31**, 2, 103-128.
- Borangui, Th., Gilbert, G., Ivanescu, N. and A. Rosu (2008). Holonic Robot Control for Job Shop Assembly by Dynamic Simulation, *Proc. of the 16th Mediterranean Conference on Control and Automation – MED'08*, June 2008, Ajaccio.
- Borangui, Th., Ivanescu, N., Raileanu, S. and A. Rosu (2008a). Vision-guided Part Feeding in a Holonic Manufacturing System, *Proc. of 16th Workshop on Robotics in Alpe-Adria-Danube Region RAAD'09*, Ancona, 51-56
- Cheng, F.-T., Chang, C.-F. and S.-L. Wu (2006). Development of Holonic Manufacturing Execution Systems Industrial Robotics: Theory, Modelling and Control, and Control, *Advanced Robotics Systems*, Vienna, Pro Literatur Verlag Robert Mayer-Scholz.
- Gouyon, D., Pétin, J.-F. and G. Morel (2007). A product-driven reconfigurable control for shop floor systems, *Studies in Informatics and Control*, **16**.
- Groover, M. (1987). *Automation, Production Systems and CIM*. Prentice-Hall.
- Higuera, A.G. and A.C. Montalvo (2007). RFID-enhanced multi-agent based control for a machining system, *Int. J. on Flexible Manufacturing Systems*, **19**, Springer, 41-61.
- Jia, H.Z. and H. Fuh (2002). Web-based multi-functional scheduling system for a distributed manufacturing system, *Concurrent Engineering*, **10**, 1, 27-39.
- Kusiak, A. (1990). *Intelligent Manufacturing Systems*, Prentice Hall, Englewood Cliffs, New York.
- Lastra, J. and I. Delamerm (2006). Semantic web services in factory automation: Fundamental insights and research roadmap, *IEEE Trans. on Industrial Informatics*, **2**, 1-11.
- Leitao, P. and F. Restivo (2006). ADACOR: A holonic architecture for agile and adaptive manufacturing control, *Computers in Industry*, **57**, 121-130.
- Liu, C.L. and J.W. Layland (1973). Scheduling algorithms for multiprogramming in a hard real-time environment. *Journal of ACM*, **20**, 46-61.
- Lusch, R.F., Vargo, S.L. and G. Wessels (2008). Towards a conceptual foundation for service science: Contributions from service-dominant logic, *IBM Systems Journal*, **47**, 1.
- Marchand, H., Bournai, P., Le Borgne, M. and P. Le Guernic (2000). Synthesis of discrete-event controllers based on the signal environment, *Discrete Event Dynamic Systems: Theory and Applications*, **10**, 325-346.
- Pétin, J.-F., Gouyon, D. and G. Morel (2007). Supervisory synthesis for product-driven automation and its application to a flexible manufacturing cell, *Control Engineering Practice*, **15**, 595-614.
- Rahimifard, S. (2004). Semi-heterarchical product planning structures in the support of team-based manufacturing, *Int. J. Prod. Res.*, **42**, 3369-82
- Sha, L. *et al*. (2004). Real Time Scheduling Theory: A Historical Perspective, *Real-Time Systems*, **28**, 101-155.
- Upton, D. (1992). Flexible Structure for Computer Controlled Manufacturing System. *Manufacturing Review*, **5**, 58-74.
- Valckenaers, P., Van Brussel, H., Bongaerts, L. and J. Wyns (1994). Results of the holonic control system benchmark at the KULeuven, In: *Proceedings of the CIMAT Conference (CIM and Automation Technology)*, 128-133. Rensselaer Polytechnic Institute, Troy, New York.
- Van Brussel, H., Wyns, J., Valckenaers, P., Bongaerts, L. and P. Peeters (1998). Reference Architecture for Holonic Manufacturing Systems: PROSA, *Computers in Industry, Special Issue on Intelligent Manufacturing Systems*, **37**, 3, 255 – 276.