

A discussion on multivariable fractional prefilters DC and FBLFD in path tracking design

Najah Yousfi-Allagui*, Pierre Melchior**, Nabil Derbel*

* Control & Energy Management laboratory, university of sfax, Sfax Engineering School, Tunisia,
(e-mail:yousfi.najah@yahoo.fr, nabil.derbel@ieee.org)

** IMS-UMR 5218 CNRS, University of Bordeaux-IPB-Talence cedex,
(e-mail: Pierre.Melchior@ims-bordeaux.fr)

Abstract: This paper is devoted to the study of robust path tracking and motion control. A method based on fractional prefilter synthesis was already advanced and extended to multivariable systems. In previous study, an approach using fractional prefilter of type Davidson Cole is advanced and tested on MIMO systems. The contribution of this work is to extend the precedent work using a fractional prefilter of type Frequency Band Limited Fractional Differentiator (FBLFD), whose important characteristics are to eliminate overshoots and to have maximum control value at starting time, through two techniques of optimization of prefilter parameters. Firstly, only the prefilter parameters are optimized and in a second stage the global transfer function is assimilated to a FBLFD prefilter and a general optimization is considered. The MIMO-QFT (Multiple Input Multiple Output Quantitative Feedback theory) design mixed with CRONE control methodology is used to select the feedback controller. Thereafter, the procedure of prefilter parameters optimization is explained. A comparative study is discussed through a simulation results applied on a SCARA robot model.

Keywords: DC fractional prefilter, FBLFD fractional prefilter, Multivariable systems, Path tracking.

1. INTRODUCTION

The large majority of industrial processes are multivariable systems (MIMO: Multiple-Input Multiple-Output). The Quantitative Feedback Theory (QFT) (Choi,2009;Horowitz, 2001; Qudrat, 2015; Mohammad, 2005) is one of the most used approaches in the problem of MIMO systems. The QFT method is a two-degree-of freedom (2DOF) feedback control approach used for uncertain MIMO plants. The aim of the QFT technique is how to design the feedback controller and the prefilter such that obtaining satisfactory performances in the presence of plant uncertainties.

The MIMO QFT problem is usually replaced by an adequate number of MISO (Multiple-Input Single-Output) problems. A combination of the feedback controller and prefilters which are designed for every MISO system is the solution of the initial MIMO QFT problem. Various approaches have been developed in order to obtain the appropriate compensator (Aissa, 2015; Melchior, 2009; Yousfi, 2012b-2013-2014c) for the equivalent MISO systems.

The CRONE control (Oustaloup, 1975-1991-1995a-1995b) can determine, by a frequency design, a robust controller for highly uncertain plants. Desired specifications like precision, rapidity and overshoots are assured by the determination of the open loop transfer function. After that, the ratio of the open loop transfer function by the nominal plant gives the

controller expression. The CRONE control approach contains three generations depending on the type of plant frequency uncertainty domain. The CRONE control design is used in this work to obtain the suitable plant controller.

In path tracking situation, a prefilter is generally applied due to its simplicity to adapt and implement to reduce overshoots and overvoltages. Prefilter decreases at high frequency the energy of path planning signal. Nevertheless, the overshoots reduction automatically produces a reduction of dynamic performances for classic linear prefilter approaches. An approach based on fractional (or non-integer order) derivative (Melchior, 2005; Oustaloup, 1995; Samko, 1993) is used in multivariable path tracking design. This approach has been developed with a Davidson-Cole (DC) prefilter (Yousfi, 2012a -2012b-2013-2014c; Melchior, 2013).

A continuous variation on the two constitutive parameters of a DC prefilter (η and τ) can limit the resonance of the feedback control loop. An optimal movement which leads to a minimum path completion time is generated by this prefilter while considering both closed-loop system bandwidth and actuators physical constraints. Also, another fractional prefilter of type frequency band limited fractional differentiator (FBLFD) is considered in multivariable path tracking design (Yousfi, 2014a).

Now, the purpose is to present two approaches based on FBLFD prefilter to optimize both prefilter or plant outputs

and to extend it to multivariable systems in the case of trajectory tracking. The main properties of a FBLFD prefilter is eliminating plant overshoots and obtaining maximum control value at starting time by the way of adding a numerator. Minimizing the settling time of the output and maximizing the bandwidth energy between input / output, the parameters of the FBLFD prefilter (η , τ_1 , τ_2) can be optimized. Firstly, a comparative study between these two methodologies is considered. In a second stage, these approaches which consider the FBLFD prefilter was also compared with these ones based on DC prefilter.

This work is structured as follows. Section 2 briefly describes background about MIMO-QFT design and CRONE control methodology. FBLFD prefilter approaches based on prefilter and I/O transfer function optimization are presented in section 3. The two methodologies of fractional prefilter optimization based on DC prefilter are given in section 4. In section 5, the pertinence of this approach is discussed by simulations on a SCARA robot model, while the principal conclusions are established in the final section of this work.

2. PRELIMINARIES ABOUT MIMO-QFT AND CRONE CONTROL

2.1 Quantitative Feedback Theory (QFT)

A Linear Time Invariant two Degrees Of Freedom system configuration is considered (see Fig 1), where $P = [p_{ij}]_{m \times m}$ is a square and minimum-phase uncertain plant to be controlled, G and F are the controller and the prefilter to be designed respectively.




Fig 1 Two-degrees-of-freedom control MIMO system structure

The transfer matrix T is :

$$T = \frac{Y}{R} = [I + PG]^{-1}PGF \quad (1)$$

P is a nonsingular matrix, P^{-1} is divided into:

$$P^{-1} = \Lambda + B \quad (2)$$

Where:

- Λ : the diagonal part of P^{-1}
- B : the balance of P^{-1}

The transfer matrix T obeys:

$$T = [\Lambda + G]^{-1}[GF - BT] \quad (3)$$

For a MIMO system, a 2×2 system is equivalent to 4 subsystems (MISO structure) (Fig.2) (Melchior, 2009).

Where:

$$q_{ij} = \frac{\det \mathbb{Q}(P)}{\text{adj}(P_{ij})} \quad (4)$$

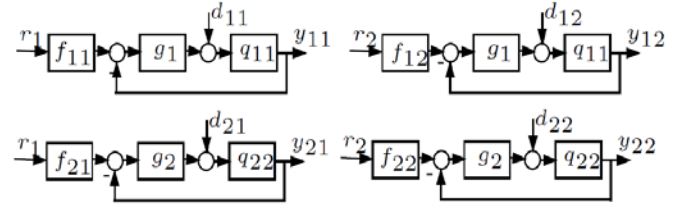


Fig 2 Two-degrees-of-freedom control system MIMO structure

The transfer function matrix T elements have the following expression:

$$t_{ij} = \omega_{ii}(v_{ij} + d_{ij}) = t_{rij} + t_{dij} \quad (5)$$

Where:

$$\omega_{ii} = \frac{q_{ii}}{1 + g_i q_{ii}}$$

$$v_{ij} = g_i f_{ij}$$

And

$$d_{ij} = - \sum_{k \neq i}^m \left[\frac{t_{kj}}{q_{ik}} \right], k = 1, 2, \dots, m$$

When d_{ij} is considered as a disturbances, the feedback structure turns into a SISO-QFT design.

t_{dij} must be lower than a small positive function in order to eliminate disturbances.

2.2 CRONE control

In 1970, The CRONE (French acronym: Commande Robuste d'Ordre Non Entier) control approach were synthesized by Oustaloup (Oustaloup, 1975). The base of this methodology is the use of fractional differentiation in the design of the open loop transfer function which is parameterized with few parameters. The CRONE control technique is characterized by three generations. By the reason of various plant frequency uncertainty types, the third generation of CRONE Control approach is recommended.

For more details you can see (Lanusse, 2000; CRONE research group, 2010; Nelson Gruel, 2009).

3. FREQUENCY BAND LIMITED FRACTIONAL DIFFERENTIATOR PREFILTER

3.1 Principle and definition

A frequency band-limited fractional differentiator system is a fundamental system characterized by the transmittance F_{FBLFD} :

$$F_{FBLFD}(s) = \left(\frac{1 + \tau_2 s}{1 + \tau_1 s} \right)^\eta \quad (6)$$

Equation (6) is the expression of an FBLFD filter where η is a real.

The FBLFD prefilter described by (6), at high frequencies, decreases the energy of the signal through selecting bandwidth (τ_1 , τ_2) and with the continuous nature of the real order η . The briny characteristics of the FBLFD prefilter are as follow:

- Eliminating the plant output overshoots,
- having the maximum value of control at starting time and,
- maximum bandwidth energy.

3.2 Method 1: Fractional prefilter of type F_{FBLFD}

For a SISO path tracking design (see Fig 3), the prefilter $F(s)$ separates the regulation and the dynamics behaviors in position control. This approach uses fractional prefilter and only the control loop reference input is optimized.




Fig 3 SISO control structure

The transfer functions $T_{y/r'}(s)$:

$$T_{y/r'}(s) = \frac{y(s)}{r'(s)} = f(s) \frac{g(s)q(s)}{1+g(s)q(s)} \quad (7)$$

where, $f(s)$, $g(s)$ and $q(s)$ are respectively the transfer functions of the filter, the controller and the plant.

In order to allow a good tracking performances it is required that:

- The sensitivity transfer function $S(s)$ must have a small magnitude for small frequencies which attenuate the disturbances effects.

$$S(s) = \frac{1}{1+g(s)q(s)} \quad (8)$$

- Also, the complementary sensitivity transfer function $T(s)$ must, for high frequencies, be small in magnitude, and for small frequencies it must be equal to unit to follow asymptotically the input.

$$T(s) = \frac{g(s)q(s)}{1+g(s)q(s)} \quad (9)$$

The reference sensitivity function S_{ref} between the control and the input signal is given by:

$$\begin{aligned} S_{ref}(s) &= \frac{u(s)}{r'(s)} = f(s) \frac{g(s)}{1+g(s)q(s)} \\ &= \frac{T_{y/r'}(s)}{q(s)} = f(s) \frac{T(s)}{q(s)} \end{aligned} \quad (10)$$

In order to avoid overshoots, the frequency constraint is (Melchior, 2007):

$$\forall \omega > 0, |S_{ref}(j\omega)| < \frac{u_{max}}{e_{max}} \quad (11)$$

Where u_{max} is the maximum static constant value of the control signal and e_{max} is a constant signal applied on the prefilter input.

From expression (10), it is deduced that the frequency constraint which puts the signals to be controlled under its maximum limit, is:

$$\forall \omega > 0, \left| \frac{1+j\tau_2\omega}{1+j\tau_1\omega} \right|^\eta \times \left| \frac{g(\omega)}{1+g(\omega)q(\omega)} \right| < \frac{u_{max}}{e_{max}} \quad (12)$$

Using the initial value theorem and the equation (12), we can deduce the following expression of the parameter τ_2

$$\tau_2 = \left[\left(\lim_{s \rightarrow \infty} \frac{1+g(s)q(s)}{g(s)} \right) \frac{u_{max}}{e_{max}} \right]^{\frac{1}{\eta}} \times \tau_1 \quad (13)$$

Thanks to the expression (13), we are asked to find only the two parameters (η ; τ_1).

The desired range of the closed-loop transfer function is described by two frequency bounds specified bellow:

$$\forall \omega > 0, \tau > 0, |T_{RL}(j\omega)| \leq |T_{y/r'}(j\omega)| \leq |T_{RU}(j\omega)| \quad (14)$$

This equation (14) becomes:

$$\forall \omega > 0, \tau > 0, |T_{RL}(j\omega)| \leq |T_{y/r'}(j\omega)|_{min} \quad (15)$$

$$|T_{y/r'}(j\omega)|_{max} \leq |T_{RU}(j\omega)| \quad (16)$$

with the closed loop transfer function:

$$T_{y/r'}(j\omega) = \frac{f_{ii}(j\omega)g_i(j\omega)q_{ii}(j\omega)}{1+g_i(j\omega)q_{ii}(j\omega)} \quad (17)$$

3.3 Method 2: I/O transfer function for SISO systems of type F_{FBLFD}

This approach is an extension of the previous method based on FBLFD type transfer function which does optimizes the output of the plant. In path tracking design, for a SISO system, the filtered unity feedback control loop is given by Fig 4 :

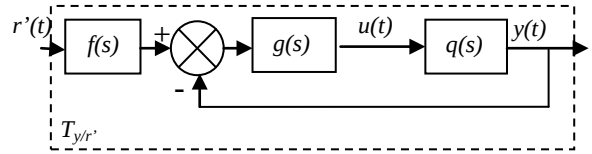


Fig 4 SISO control structure

$T_{y/r'}(s)$ is the transfer function of the filtered unity feedback control:

$$T_{y/r'}(s) = \frac{y(s)}{r'(s)} = f(s) \frac{g(s)q(s)}{1+g(s)q(s)} \quad (18)$$

The I/O transfer function $T_{y/r'}(s)$ is in accordance with the following expression (Melchior, 2007):

$$T_{y/r'}(s) = \left(\frac{1+\tau_2 s}{1+\tau_1 s} \right)^\eta \frac{1}{(1+\tau_2 s)^m} \quad (19)$$

where m is the plant order. In order to avoid overshoots, the frequency constraint is (Melchior, 2007):

$$\forall \omega > 0, |S_{ref}(j\omega)| \leq \frac{u_{max}}{e_{max}} \quad (20)$$

where u_{max} is the control signal maximum static constant value and e_{max} is a constant signal applied on the prefilter input.

The frequency constraint of the FBLFD I/O transfer function is as follow, for better explained details we can consult (Melchior, 2007; Melchior, 2012; Yousfi,

2014b):

$$\left\{ \begin{array}{l} \forall \omega > 0, \frac{1}{|q(j\omega)|} \left| \frac{1+j\tau_2\omega}{1+j\tau_1\omega} \right|^\eta \frac{1}{|1+j\tau_2\omega|^m} < \frac{u_{max}}{e_{max}} \\ \left(\frac{a_p}{b_q} \right)^m < \tau_1 \\ \tau_2 = \left(\frac{a_p}{b_q} \tau_1^\eta \right)^{\frac{1}{\eta-m}} \\ q_1(s) = \frac{1+a_1s+\dots+a_ps^p}{1+b_1s+\dots+b_qs^q} \text{ and } q \geq p \text{ and } m = q - p \\ q(s) = \frac{K_0}{s^r} q_1(s) \end{array} \right. \quad (21)$$

Where

- r : is the number of integrations and
- K_0 : is the static gain in the plant

The desired range of the closed-loop transfer function is characterized by two frequency constraints given by (14), (15) and (16) with the closed loop transfer function:

$$T_{y/r'_{ii}}(j\omega) = \left(\frac{1+j\tau_{2i}\omega}{1+j\tau_{1i}\omega} \right)^{\eta_i} \frac{1}{(1+j\tau_{2i}\omega)^m} \quad (22)$$

3.4 FBLFD prefilter optimization

The frequency constraints of both approach are used to avoid the saturation of the control input signal. In order to extract a step response without overshoot, the integral gap criteria is often used. For the F_{FBLFD} step response, the analytic expression of the integral gap is (Melchior, 2007):

$$I_e \leq \eta(\tau_1 - \tau_2) \quad (23)$$

This expression for $k \times k$ MIMO system becomes:

$$I_e \leq \eta_1(\tau_{11} - \tau_{21}) + \eta_2(\tau_{12} - \tau_{22}) + \dots + \eta_k(\tau_{1k} - \tau_{2k}) \quad (24)$$

For the second method, the prefilter expression can be deduced from the FBLFD I/O transfer function ((18) and (19)):

$$f(s) = \frac{1+g(s)q(s)}{g(s)q(s)} \left(\frac{1+\tau_2s}{1+\tau_1s} \right)^\eta \frac{1}{(1+\tau_2s)^m} \quad (25)$$

4. DAVIDSON COLE PREFILTER

4.1. Principle and definition

The fractional prefilter of type Davidson Cole (DC) $F_{DC}(s)$ is described by the following expression:

$$F_{DC}(s) = \frac{1}{(1+\tau s)^\eta} \quad (26)$$

This prefilter permits to reduce the energy of the signal at high frequencies. It is simply used to reduce overshoots like analog or digital filter (Melchior, 2009; Yousfi, 2013).

4.2 Method 1: Fractional prefilter of type DC

Considering Fig.3, in order to avoid overshoots, the frequency constraint is:

$$\forall \omega > 0, |S_{ref}(\omega)| < \frac{u_{max}}{e_{max}} \quad (27)$$

From (10), it is deduced that:

$$\forall \omega > 0, \left| \frac{1}{1+j\tau\omega} \right|^\eta \times \left| \frac{g(\omega)}{1+g(\omega)q(\omega)} \right| < \frac{u_{max}}{e_{max}} \quad (28)$$

The Closed loop transfer function must be into the desired bounds T_{RL} and T_{RU} (see (14), (15), (16) and (17))

4.3 Method 2: I/O transfer function for SISO systems of type DC

In this section, the I/O Davidson-Cole type transfer function $T_{y/r'}$ takes the following form:

$$T_{y/r'}(s) = \frac{y(s)}{r'(s)} = \frac{1}{s^r(1+\tau s)^\eta} \quad (29)$$

with r is the number of integration in the plant.

To avoid overshoots the reference sensitivity transfer function S_{ref} must verify the inequality (11). From (9), (10), (20) and (21) it is deduced the following frequency constraint:

$$\forall \omega > 0, \left| \frac{1}{1+j\tau\omega} \right|^\eta \times \left| \frac{1}{q_1(\omega)} \right| < \frac{u_{max}}{e_{max}} \quad (30)$$

The acceptable variation range of the closed loop systems is defined by (14), (15), (16) where:

$$T_{y/r'_{ii}}(j\omega) = \left(\frac{1}{1+j\tau_1\omega} \right)^{\eta_i} \frac{1}{(j\omega)^r} \quad (31)$$

4.4 DC prefilter optimization

For a step response of a DC transfer function, the integral gap criterion is given by the following expression:

$$I_e \leq \eta\tau \quad (32)$$

For a multivariable system of order m , this expression (32) becomes:

$$I_e \leq \eta_1\tau_1 + \eta_2\tau_2 + \dots + \eta_m\tau_m \quad (33)$$

The prefilter expression for the second approach is obtained from the I/O DC type transfer function:

$$f(s) = \frac{1+g(s)q(s)}{g(s)q(s)} \left(\frac{1}{1+\tau s} \right)^\eta \frac{1}{s^r} \quad (34)$$

5. NUMERICAL SIMULATION

5.1 SCARA robot model

The adept one SCARA robot (Garcia-sanz, 2002; Yousfi, 2013) is considered to verify the effectiveness of our approach of MIMO-QFT using a diagonal controller with FBLFD and DC prefilters.

The plant outputs are the two angles δ_1 and δ_2 . However the input signals are u_1 and u_2 . These two signals u_1 and u_2 will be applied to the motors robot. The Lagrange equation method has been used to obtain the SCARA robot model (Garcia-sanz, 2002).

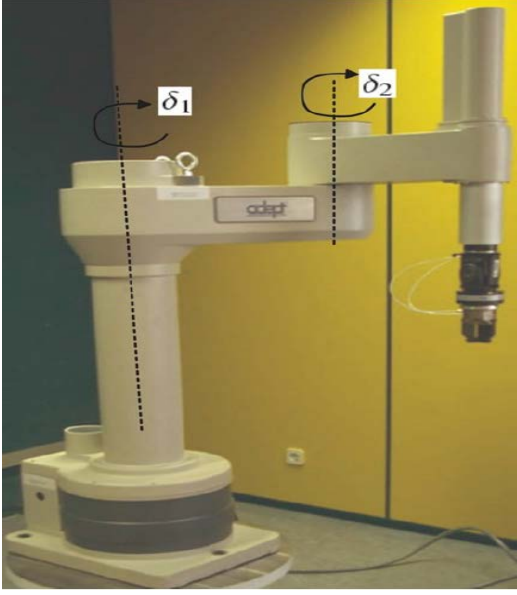


Fig 5 SCARA robot

$$\begin{pmatrix} \delta_1 \\ \delta_2 \end{pmatrix} = P(s) \begin{pmatrix} u_1 \\ u_2 \end{pmatrix} = \begin{pmatrix} p_{11} & p_{12} \\ p_{21} & p_{22} \end{pmatrix} \begin{pmatrix} u_1 \\ u_2 \end{pmatrix} \quad (35)$$

$$P(s) = \begin{pmatrix} \frac{\alpha_2 s + v_2}{s \Delta(s)} \frac{1}{k} & \frac{-(\alpha_2 + \alpha_3 h)}{\Delta(s)} \frac{1}{k} \\ \frac{-(\alpha_2 + \alpha_3 h)}{\Delta(s)} \frac{1}{k} & \frac{(\alpha_1 + 2\alpha_3 h)s + v_1}{s \Delta(s)} \frac{1}{k} \end{pmatrix} \quad (36)$$

Where

$$\Delta(s) = \sigma_2 s^2 + \sigma_1 s + \sigma_0$$

$\alpha_{i,j=1,2,3}$ and $\sigma_{j,j=0,1,2}$ are as follow:

- $\sigma_0 = v_1 v_2$
- $\sigma_1 = \alpha_2 v_1 + v_2 (\alpha_1 + 2\alpha_3 h)$
- $\sigma_2 = \alpha_2 (\alpha_1 + 2\alpha_3 h) - (\alpha_2 + \alpha_3 h)^2$
- $\alpha_1 = I_1 + I_2 + m_1 x_1^2 + m_2 (l_1^2 + x_2^2)$
- $\alpha_2 = I_2 + m_2 x_2^2$
- $\alpha_3 = m_2 l_1 x_2$

With:

k Power amplifier gain

v_i Coefficients of viscous friction

I_i Moment of inertia

m_i Mass

x_i i^{th} link

l_1 Length of link 1

h Cosine value of q_2

The plant coefficient uncertainties are given in table 1:

Table 1 MIMO plant conditions

	Minimum	Nominal	Maximum
$\alpha_1 k$	729	766	813
$\alpha_2 k$	186	193	200
$\alpha_3 k$	154	182	200
$v_1 k$	200	290	381
$v_2 k$	61.6	71.75	91.9
h	-1	0	1

5.2 Performance specifications

For both methods, the diagonal closed loop transfer function $T_{y/r'}$ must verify the following inequalities.

$$\forall \omega > 0, |T_{RL}| \leq |T_{y/r'_{ii}}| \leq |T_{RU}| \quad (38)$$

Where:

$$T_{RL}(s) = \frac{0.45}{0.1s^4 + 1.47s^3 + 5.015s^2 + 3.195s + 0.45}$$

$$T_{RU}(s) = \frac{0.4083s + 12.25}{0.1s^3 + 1.525s^2 + 6.475s + 12.25}$$

5.3 RGA matrix

Various parameters are analyzed to verify the pairing rule using the RGA (Relative Gain Array) technique. So, based in this approach we can deduce that δ_1 and δ_2 are respectively controlled by u_1 and u_2 .

5.4 Controller design

Using the CRONE control toolbox, the CRONE controller $G(s)$ of SCARA robot is obtained:

$$G(s) = \begin{pmatrix} g_{11}(s) & g_{12}(s) \\ g_{21}(s) & g_{22}(s) \end{pmatrix} \quad (39)$$

With:

$$\begin{aligned} g_{11}(s) &= \frac{5.214s^2 + 219.9s + 82.6}{0.0003157s^2 + 0.03577s + 1} \\ g_{12}(s) &= 0 \\ g_{21}(s) &= 0 \\ g_{22}(s) &= \frac{0.2821s^3 + 41.15s^2 + 233.4s + 87.8}{1.257e-07s^3 + 7.777e-05s^2 + 0.01252s + 1} \end{aligned} \quad (37)$$

5.5 Fractional prefilter

The prefilter matrix is as follow:

$$F(s) = \begin{pmatrix} f_{11}(s) & 0 \\ 0 & f_{22}(s) \end{pmatrix} \quad (40)$$

Firstly, it is recommended to select the maximum and minimum of plants. After that, the ratio $\frac{u_{max}}{e_{max}}$ is fixed.

5.5.1 Prefilter of type FBLFD

a. *method 1*: Minimizing (24) and making into consideration the frequency constraints (12 and 13) and the performance tracking specifications (14,15 and 16), the optimized parameters are:

$$\eta_1 = 2.783; \tau_{11} = 0.786; \tau_{21} = 0.615 \quad (41)$$

$$\eta_1 = 2.783; \tau_{11} = 0.786; \tau_{21} = 0.615$$

A rational approximation of the fractional prefilter $F(s)$ can be found through a graphic design using the CRONE software:

$$f_{11}(s) = \left(\frac{1+\tau_{21}s}{1+\tau_{11}s} \right)^{\eta_1} = \frac{6.9302(s+567.8)(s+143)(s+9.62)}{(s+770.8)(s+252)(s+16.2)(s+1.55)(s+1.11)} \quad (42)$$

$$f_{22}(s) = \left(\frac{1+\tau_{22}s}{1+\tau_{12}s} \right)^{\eta_2} = \frac{0.0084507(s+762)(s+130)(s+26.28)(s+12.31)(s+3.14)}{(s+617.9)(s+104.1)(s+26.27)(s+2.691)(s+0.187)} \quad (43)$$

b. method 2: Minimizing the integral gap criterion (24), and taking into account the frequency constraints (21) and the performance tracking specifications (14,15 and 16), we can obtain the optimized parameters:


$$\begin{aligned} \eta_1 &= 1.266; \tau_{11} = 0.984; \tau_{21} = 0.558 \\ \eta_1 &= 1.914; \tau_{11} = 0.714; \tau_{21} = 0.12 \end{aligned} \quad (44)$$

The prefilter expression $F(s)$ is deduced from the I/O transfer function (25). A rational approximation is determined of each element of the prefilter $F(s)$:


$$f_{11}(s) = \frac{1+g_{11}(s)q_{11}(s)}{g_{11}(s)q_{11}(s)} \left(\frac{1+\tau_{21}s}{1+\tau_{11}s} \right)^{\eta_1} \frac{1}{(1+\tau_{21}s)} = \frac{33.4999(s+505.7)(s+272.2)(s+81.47)(s+0.3801)}{(s+260.8)(s^2+1830s+8.382e05)(s+0.6532)} \quad (45)$$

$$f_{22}(s) = \frac{1+g_{22}(s)q_{22}(s)}{g_{22}(s)q_{22}(s)} \left(\frac{1+\tau_{22}s}{1+\tau_{12}s} \right)^{\eta_2} \frac{1}{(1+\tau_{22}s)} = \frac{0.029106(s+404.4)(s^2+62.71s+984.2)(s+234.4)(s^2+335.3s+2.837e04)}{(s+878)(s+630.5)(s+90.07)(s+54.12)(s+13.1)(s+2.18)} \quad (46)$$

c. Simulation results: The resultant time domain closed-loop tracking response under all plant cases are given by Fig 6. The closed-loop tracking responses under all operating cases are exposed in Fig. 6, where the tracking requirements are plotted in black line. As observed, the proposed methodology leads to satisfactory performances. A comparison of the results obtained via the first methodology with thus of the closed-loop tracking responses obtained using the second method clearly presents the benefits of the second approach which optimizes the global I/O closed loop transfer function.

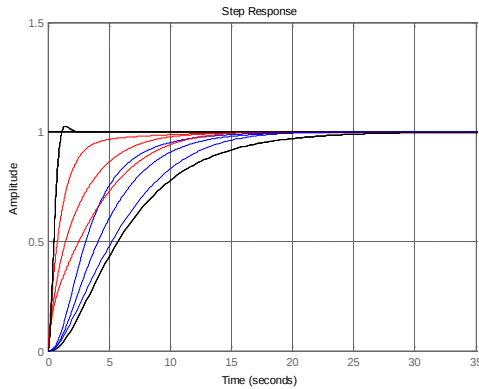

(a)

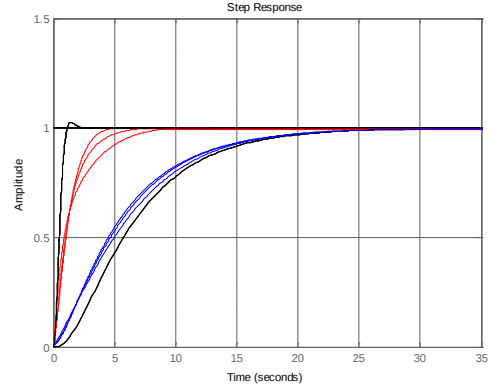

(b)

Fig 6 (a),(b) : Closed loop tracking response with fractional FBLFD prefilter using method 1(dashed line) and method 2(Continued red line), tracking references (black)

5.5.2 DC prefilter

a. Method 1: Minimizing the integral gap criterion (33) under the frequency constraint (28) and the performance tracking specifications (14,15 and 16),the optimized parameters are:

$$\begin{aligned} \eta_1 &= 1.1; \tau_1 = 1.052; \\ \eta_2 &= 1.592; \tau_2 = 0.815; \end{aligned} \quad (47)$$

Using the CRONE software, the rational approximation of the fractional prefilter obeys:

$$f_{11}(s) = \left(\frac{1}{1+\tau_1 s} \right)^{\eta_1} = \frac{633.546(s+340.1)(s+57.8)(s+2.44)}{(s+931)(s+415.1)(s+41.89)(s^2+2.74s+1.877)} \quad (48)$$

$$f_{22}(s) = \left(\frac{1}{1+\tau_2 s} \right)^{\eta_2} = \frac{32.8014(s+269.1)(s+47.86)(s+9.516)}{(s+805.9)(s+89.02)(s+21.6)(s+2.378)(s+1.091)} \quad (49)$$

b. Method 2: Minimizing the integral gap criterion (33) under the frequency constraint (30) and the performance tracking specifications (14,15 and 16),the optimized parameters are:


$$\begin{aligned} \eta_1 &= 1.8; \tau_1 = 1.2 \\ \eta_2 &= 1.599; \tau_2 = 1.299 \end{aligned} \quad (50)$$

From (31), we can deduce each elements of the prefilter matrix $F(s)$:


$$f_{11}(s) = \frac{1+g_{11}(s)q_{11}(s)}{g_{11}(s)q_{11}(s)} \left(\frac{1}{1+\tau_1 s} \right)^{\eta_1} \frac{1}{s} = \frac{0.085424(s+328.9)(s+54.1)(s+6.679)(s+0.392)}{(s+585)(s+10.7)(s+0.9836)(s+0.6468)} \quad (51)$$

$$f_{11}(s) = \frac{1+g_{22}(s)q_{22}(s)}{g_{22}(s)q_{22}(s)} \left(\frac{1}{1+\tau_2 s} \right)^{\eta_2} \frac{1}{s} = \frac{0.0011696(s+346)(s+204)(s+149)(s+1.45)}{(s+796.9)(s+15.8)(s^2+2.38s+1.416)} \quad (52)$$

c. Simulation results: The comparison between the two approaches of path tracking design by the fractional prefilters of type DC is illustrated in Fig. 7.

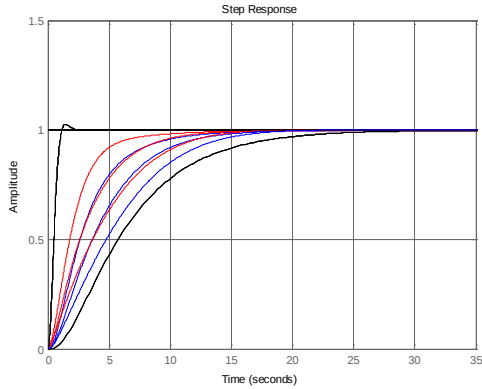

(a)

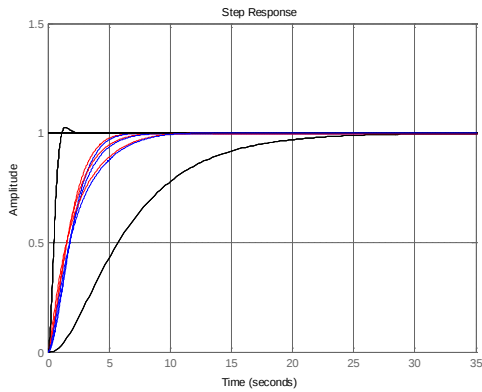


(b)


Fig 7 (a),(b) : Closed loop tracking response with fractional DC prefilter using method 1(dashed line) and method 2(Continued red line), tracking references (black)

As shown in Fig 7, both methods using DC prefilter give a satisfactory performance tracking specifications (all operating plant conditions are under specified bounds (black line)). But, it is clearly observed that the second method used with DC or FBLFD prefilter gives a better closed loop rise time and settling time. So, it is deduced that the I/O closed loop transfer function optimization proves a sufficient results.

The maximum value of the control signal using FBLFD prefilter is kept (Fig 8). This property allows the generation of optimal reference input movement which leads to a minimum path completion time which is observed in Fig.9 and table 2.

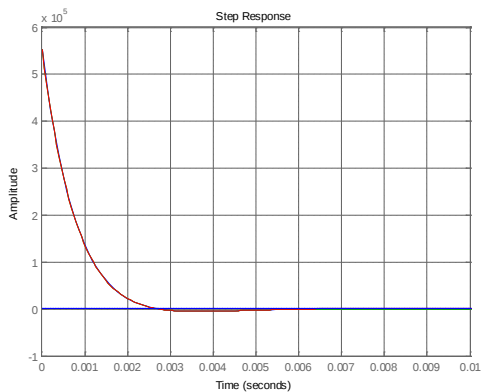


(a)

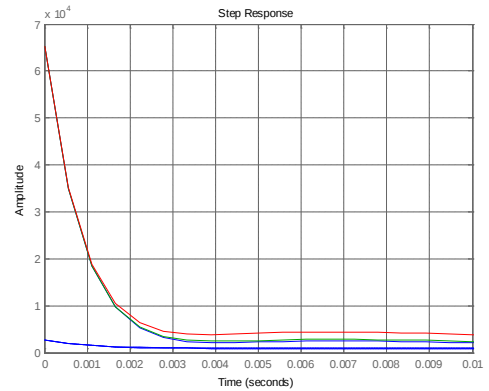


(b)

Fig 8 (a),(b) : First and second main control signals (method 2) with DC (dashed line) and FBLFD (continued line) prefilters

In Fig.9, the closed loop responses given by the I/O transfer function of type FBLFD is faster than the response obtained using the DC prefilter. These results are confirmed by the values given in table 2.

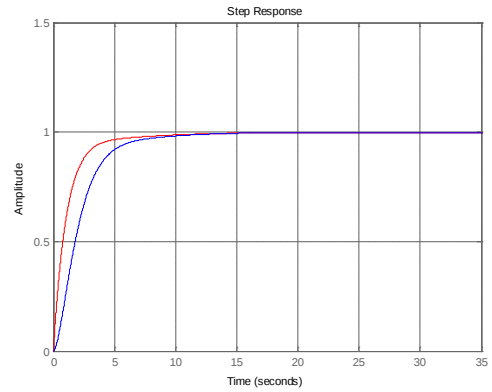

(a)

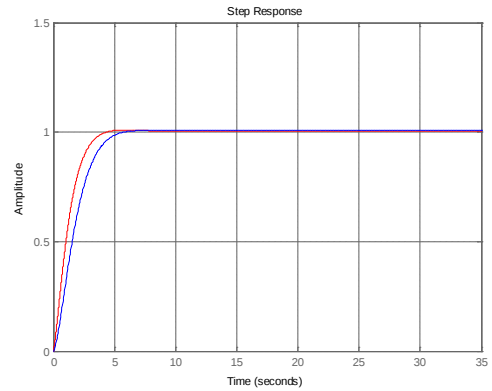

(b)

Fig 9 (a), (b): First and second main closed loop responses (method 2) with DC (dashed line) and FBLFD (continued line) prefilters

Table 2 comparison between FBLFD and DC prefilter using method 2 (case 1)

Charac.	$T_{y/r'1}:DC$	$T_{y/r'1}:FBLFD$
Rise time (s)	4.0429	2.6242
Settling time(s)	9.3074	7.3874
Charac.	$T_{y/r'2}:DC$	$T_{y/r'2}:FBLFD$
Rise time (s)	3.0739	2.3239
Settling time(s)	4.8146	3.6163

6. CONCLUSION

In this paper, an extension of path tracking design applied to multivariable systems based on a Davidson-Cole prefilter is explored. A MIMO QFT approach is used with CRONE control approach to extract the controller expression of the MIMO processes. Thereafter, the prefilter parameters have to be determined. The Frequency Band-Limited Fractional Differentiator (FBLFD) prefilter whose general properties are eliminating overshoot on the plant and having maximum control value at start time is used in this paper to resolve the problem of multivariable motion control. Two methodologies are developed. The first one is based on a local optimization of the fractional prefilter parameters and the object of the second approach is to assimilate the I/O closed loop transfer function to a fractional prefilter and to optimize the I/O transfer function parameters. A comparative study between both methods using DC or FBLFD prefilters is illustrated through a simulation on a SCARA robot model which validates the proposed methodology.

REFERENCES

- Aissa R, Kamel G, Boualem H. (2015). Design of an optimized fractional order fuzzy PID controller for a piezoelectric actuator, *Control Engineering and applied informatics*, 17(3):41-49.
- Choi H Ho. (2009). Adaptive controller design for uncertain fuzzy systems using variable structure control approach, *Automatica*; 45:2646-2650.
- CRONE research group (2010): CRONE Control Design Module User's Guide, Version 4.0.
- Franchek M, Herman P, Nwokah O. (1997). Robust non diagonal controller design for uncertain multivariable regulating systems. *J. Dynamic systems. Measurement and Control*; 119: 80-85.
- Garcia-Sanz M, Egana I, Villanueva J. (2002). Interval modeling of a SCARA robot for robust control, *10th Mediterranean Conference on Control and Automation*, Lisbon, Portugal, 9-13 July.
- Garcia-Sanz M, Egana I, Barreras M. (2005) Design of quantitative feedback theory non diagonal controllers for use in uncertain multiple-input multiple-output systems. *IEE Proceeding, Control Theory Appl.*; 152 (2):177-187.
- Horowitz, I. (1982) Improved design technique for uncertain multiple input output feedback systems. *Int. Journal of Control*; 36: 977-988.
- Horowitz I. (2001) Survey of quantitative feedback theory (QFT), *Int J. of Robust and Nonlinear Control*; 11(10):887-921.
- Lanusse P, Oustaloup A, Mathieu B. (2000). Robust control of LTI square MIMO plants using two CRONE control design approaches, *IFAC Symposium on Robust Control Design*, Prague, Czech Republic..
- Melchior P, Poty A, Oustaloup A. (2005). Path tracking design by frequency band limited fractional differentiator prefilter, *Fifth EUROMECH Nonlinear Dynamics Conference*, Eindhoven, The Netherlands, August 7-12.
- Melchior P, Poty A and Oustaloup A. (2007). Frequency band limited fractional differentiator prefilter in path tracking design, chapter in the book of *Advances in Fractional Calculus*; 7:477-492.
- Melchior P, Inarn C, Oustaloup A. (2009). Path tracking design by fractional prefilter extension to square MIMO systems, *Proceedings of the ASME 2009 International Design Engineering Technical Conferences and Computers and Information in Engineering Conference*, California, USA.
- Melchior P, Yousfi N, Rekik C, Derbel N and Oustaloup A. (2012) Path tracking design based on Frequency-Band Limited Fractional Differentiator with speed and acceleration input, *5th IFAC Workshop on Fractional Differentiation and its Applications*, Hohai University, Nanjing, China, 14-17 Mai.
- Melchior P, Yousfi N, Inarn C, Derbel N and Oustaloup A. (2013). Path tracking design based on I/O Davidson-Cole type transfer function for square MIMO systems, *Joint 5th Symposium on System Structure and Control, 11th Workshop on Time Delay Systems, 6th Workshop on Fractional Differentiation and Its Applications*, Grenoble, France.
- Mohammad S, Alavi M, Khaki Sedigh A and Labibi B. (2005) Pre-filter design for tracking error specifications in MIMO-QFT, *44th IEEE Conference on Decision and Control, and the European Control Conference*, December 12-15, Seville, Spain.
- Nelson Gruel D, Lanusse P, Oustaloup A. (2009) Decentralised CRONE control of mxn multivariable system with time-delay, *Springer Book entitled "New Trends in Nanotechnology and Fractional Calculus Applications"*.
- Oustaloup, A. (1975) Etude et réalisation d'un système d'asservissement d'ordre 3/2 de la fréquence d'un laser à colorant continu, Ph.D. Thesis, Université Bordeaux I, France.
- Oustaloup, A. (1991) The CRONE control. In: *Proceedings of the European Control Conference (ECC 91)*, Grenoble, France, 2-5 July.
- Oustaloup A. (1995). *La dérivation non entière: théorie, synthèse et applications*, Editions Hermès, Paris.
- Oustaloup A, Mathieu B, Lanusse P. (1995) Intégration non entière complexe et contours d'Isoamortissement. *Autom. Prod. Inform. Ind.*; 29(1): 177-202.
- Qudrat K, Aamer Iqbal B (2014). Robust Dynamic Integral Sliding Mode for MIMO Nonlinear Systems Operating Under Matched and Unmatched Uncertainties, *Control Engineering and applied informatics*, 16 (4):107-117.
- Samko SG, Kilbas AA, Marichev OI. (1993). *Fractional Integrals and Derivatives*, Gordon and Breach, New York.

- Yousfi N, Melchior P, Rekik C, Derbel N and Oustaloup A.
(2012a) Design of non-diagonal controller using MIMO-QFT approach combined with CRONE control: application to square system, *5th IFAC Workshop on Fractional Differentiation and its Applications, Hohai university, Nanjing, China* 14-17 Mai.
- Yousfi N, Melchior P, Rekik C, Derbel N and Oustaloup A.(
2012b) Path tracking design by fractional prefilter using a combined QFT/H1 design for TDOF uncertain feedback systems, *Journal of Applied Nonlinear Dynamics*; 1(3):239-261.
- Yousfi N, Melchior P, Rekik C, Derbel N and Oustaloup A.
(2013) Path tracking design based on Davidson-Cole prefilter using a centralized CRONE controller applied to multivariable systems, *Nonlinear Dynamics*; 70(4):701-712.
- Yousfi N, Jallouli Khelif R, Melchior P, Lanusse P, Derbel N and Oustaloup A. (2014a) Path Tracking Design by Frequency band Limited Fractional Differentiator Prefilter: Square MIMO Systems, *2014 International Conference on Fractional Differentiation and its Applications*, Catania, Italy, 23-25 June.
- Yousfi N, Melchior P, Rekik C, Derbel N and Oustaloup A.
(2014b). Decentralized CRONE control of non square multivariable systems in path tracking design, *Nonlinear Dynamics*; 76(1):447-457.
- Yousfi N, Melchior P, Rekik C, Derbel N and Oustaloup A.
(2014c) Comparison between Davidson-Cole and Frequency-Band Limited Fractional Differentiator I/O type transfer function with speed and acceleration inputs in path tracking design, *Journal of Applied Nonlinear Dynamics*; 3(1):1-16.